



CONSTRUCTION NOTES:

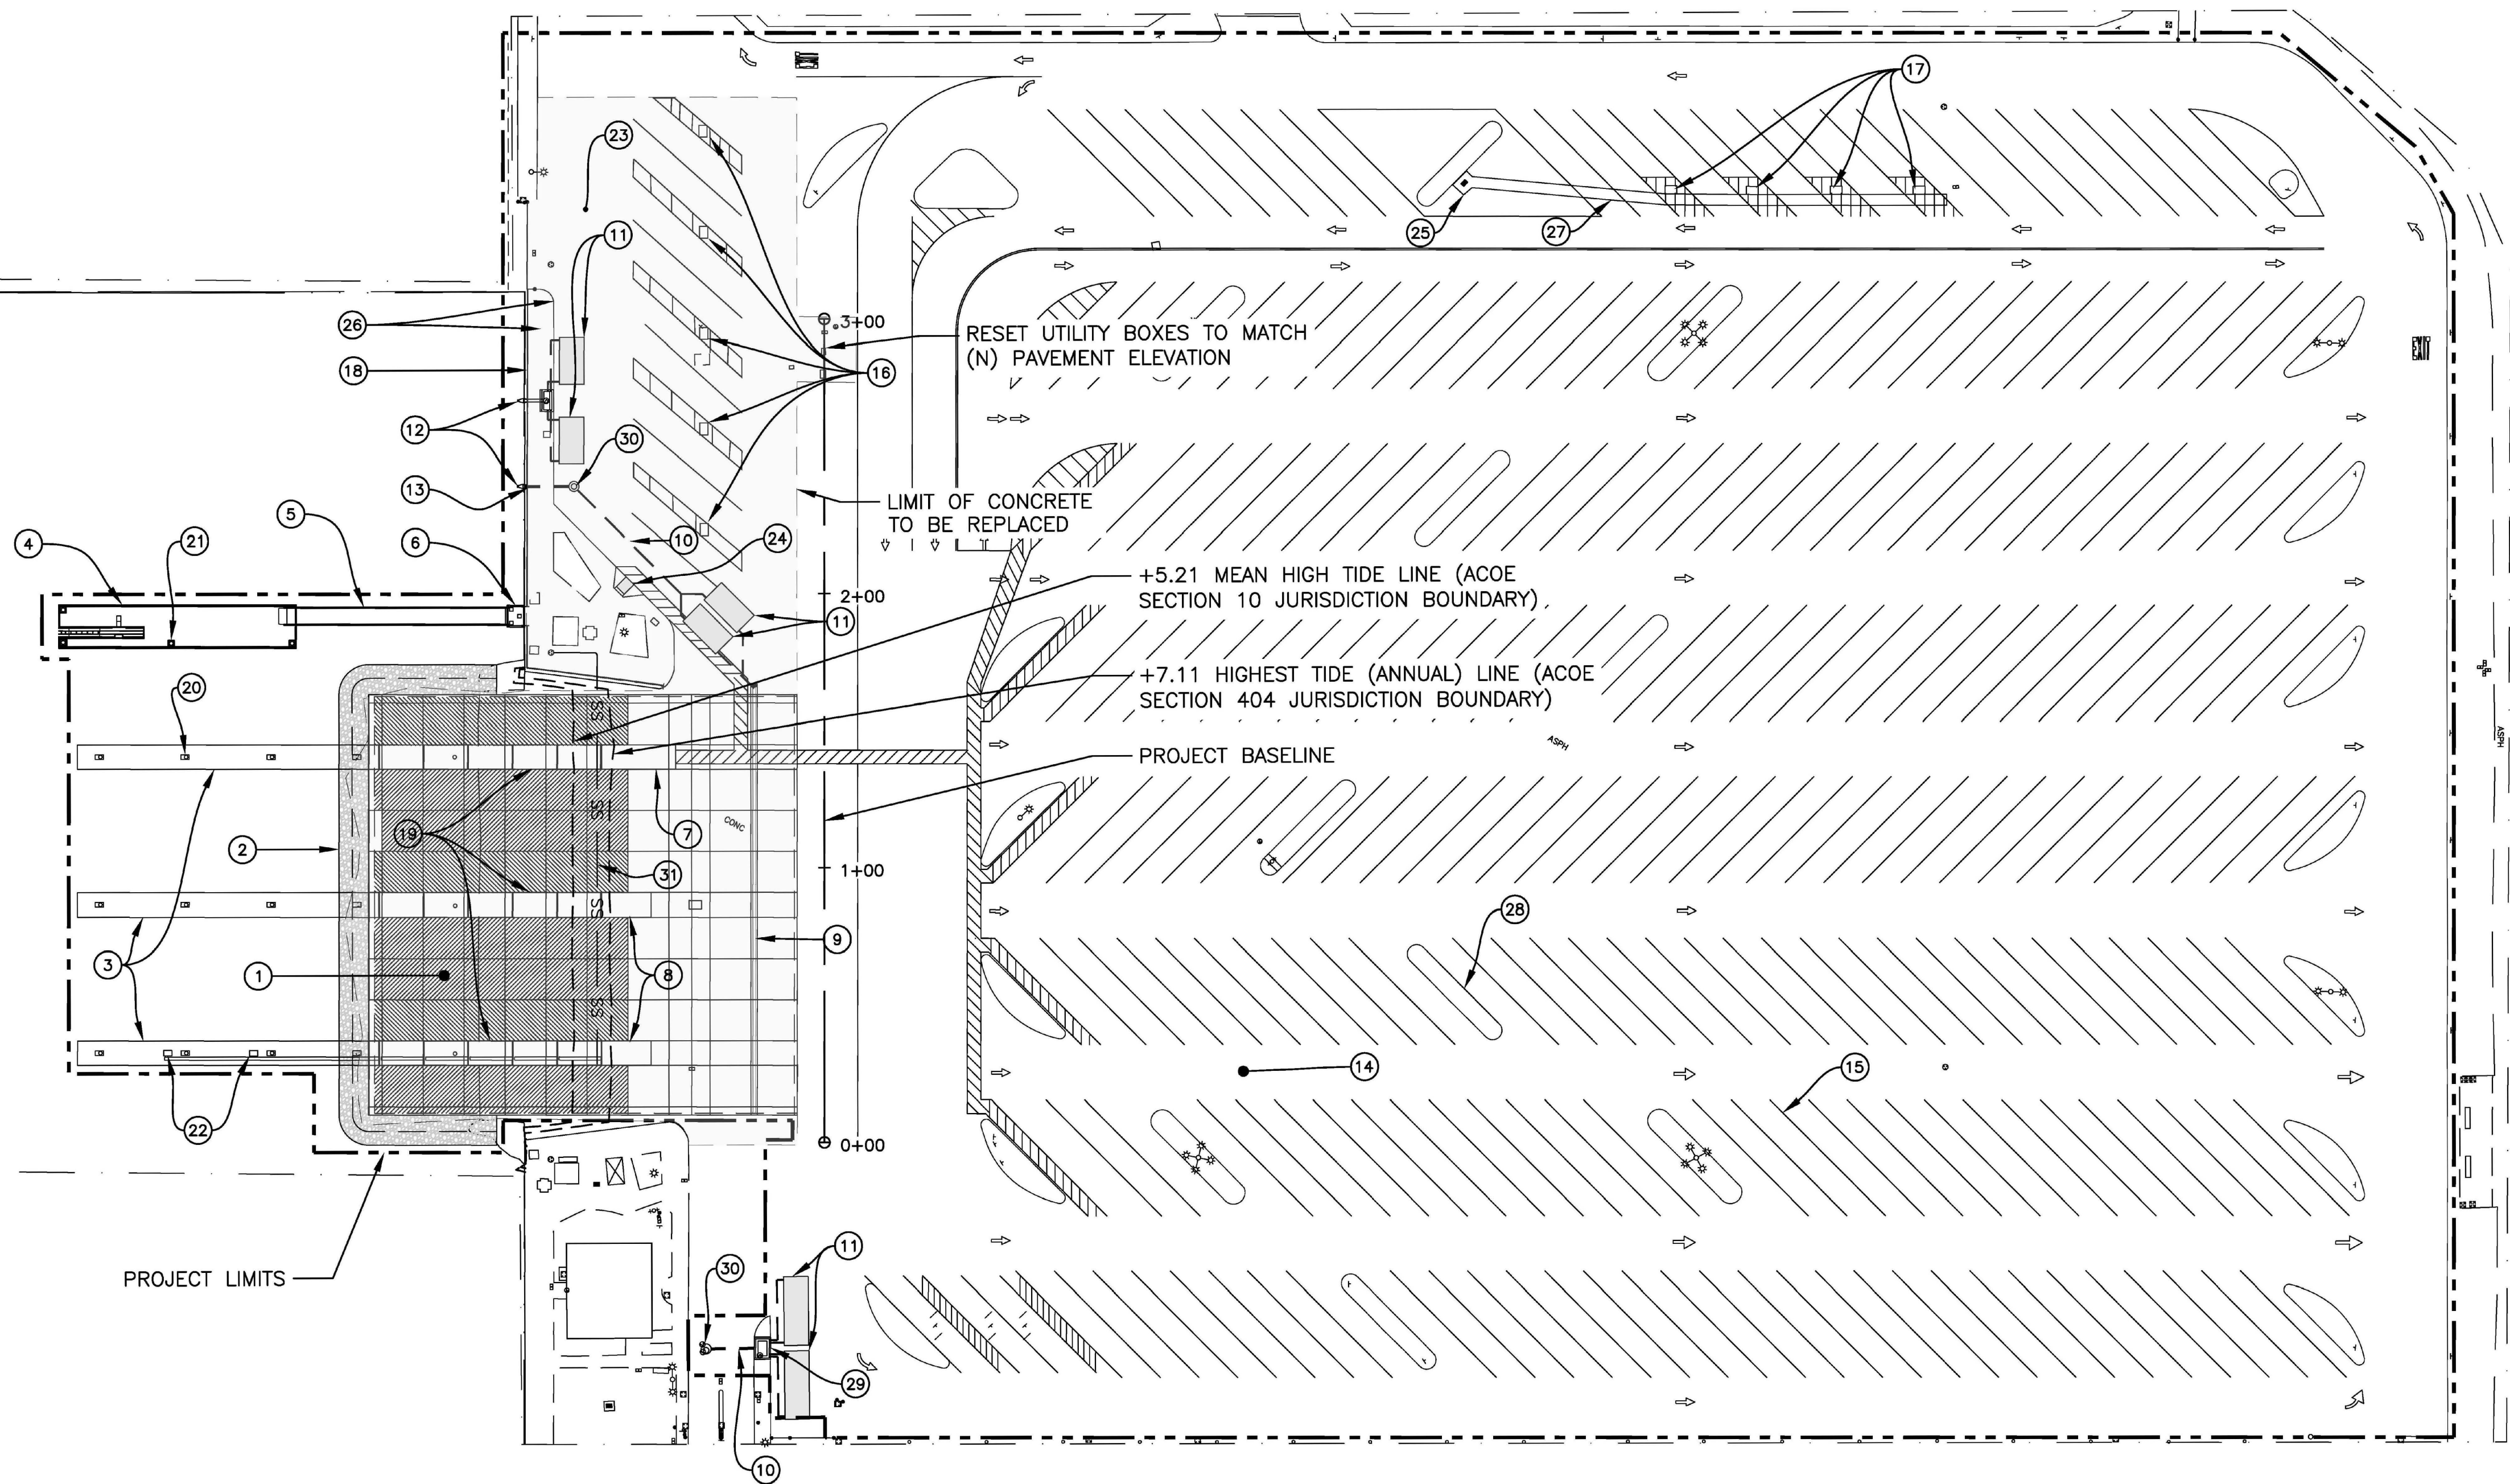

PROJECT PLAN

SCALE: 1" = 40'



ITEM	DESCRIPTION
①	8" THICK PCC RAMP PAVEMENT WITH V-GROOVE SURFACE FINISH AND APRON PAVEMENT OVER 12" OF COMPACTED BASE MATERIAL ON PREPARED SUBGRADE.
②	LIGHT CLASS STONE TOE PROTECTION.
③	NEW BOARDING FLOATS.
④	ACCESSIBLE BOARDING FLOAT.
⑤	ACCESSIBLE 80-FT LONG BY 4-FT WIDE GANGWAY.
⑥	ACCESSIBLE GANGWAY LANDING PLATFORM.
⑦	ACCESSIBLE PCC BOARDING FLOAT ABUTMENT.
⑧	BOARDING FLOAT ABUTMENT.
⑨	PCC LATERAL TRENCH DRAIN.
⑩	STORM DRAIN PIPING.
⑪	BIOFILTRATION STORMWATER TREATMENT UNITS.
⑫	TIDEFLEX CHECK VALVE.
⑬	CORE OPENING IN EXISTING SEAWALL FOR OUTFALL.
⑭	(N) PARKING LOT PAVEMENT: MILL & OVERLAY ENTIRE PARKING LOT, DIGOUT & PATCH SPECIFIED DAMAGED AREAS.
⑮	PAVEMENT STRIPING AND MARKINGS.
⑯	(N) CURB ISLANDS, BOLLARDS, AND WASHDOWN CABINETS.
⑰	(N) CURB ISLANDS AND BOLLARDS, WASHDOWN UTILITIES TO BE CUT AND PROTECTED IN UNDERGROUND VAULT FOR FUTURE USE.
⑱	FURNISH AND INSTALL 42" ALUMINUM PIPE GUARDRAIL SYSTEM (APPROX. 180').
⑲	NEW HINGED BOARDING FLOATS.
⑳	16"Ø GUIDE PILE (12 REQUIRED).
㉑	16"Ø GUIDE PILE (4 REQUIRED).
㉒	BOAT PUMPOUT SYSTEM.
㉓	WASHDOWN AREA PCC REPLACEMENT (±18,300 SF). MATCH (E) SLOPES & ELEVATIONS, FLUSH WITH (N) PARKING LOT PAVEMENT.
㉔	CURB RAMP.
㉕	CATCH BASIN TO BE REPLACED IN KIND.
㉖	SIDEWALK AND CURB AND GUTTER REPLACEMENT (±2,662 SF) IN WASHDOWN AREA. MATCH (E) SLOPES & ELEVATIONS.
㉗	4'-0" PCC RIBBON GUTTER AT (N) LOCATION OUTSIDE OF CONCRETE ISLAND.
㉘	DEMOLISH AND REPLACE APPROX. 620 LINEAL FEET OF RAISED OR DAMAGED PARKING LOT ISLAND CURB AT LOCATIONS SHOWN.
㉙	CATCH BASIN.
㉚	STORM DRAIN MANHOLE.
㉛	(N) SS PIPING TO (E) MANHOLE